




Motorola Buzz ic502 Screen and Speaker Replacement

Written By: Austin Quinn

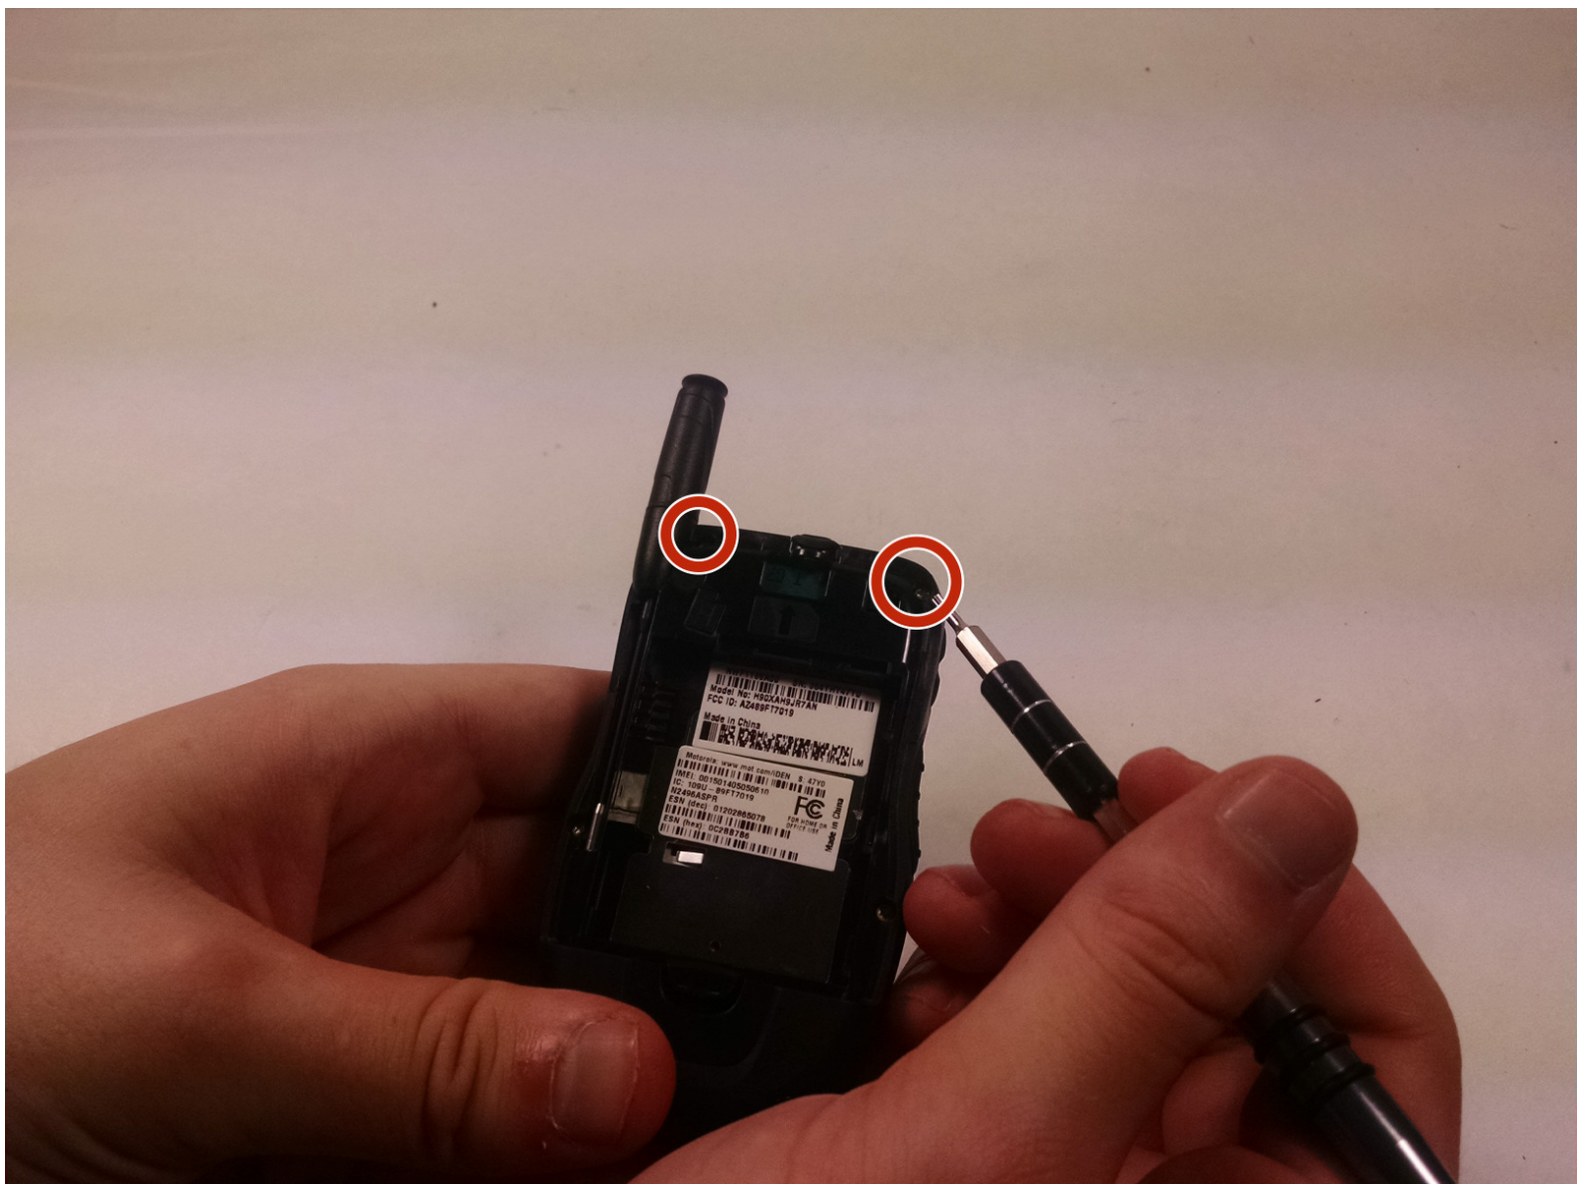

INTRODUCTION

This guide will show you how to replace the screen and the plastic display assembly along with it.

TOOLS:

- [Screwdriver T6](#) (1)
 - [Nylon spudger](#) (1)
-

Step 1 — Battery



- First flip the phone over.
- Then find the back release circled in red.

Step 2




- Carefully remove the back using the release.
- Lift from the bottom!

Step 3



- Lift the battery from the right side.
- After the battery has lifted about a 45 degree angle remove from phone.

Step 4 — Screen Assembly

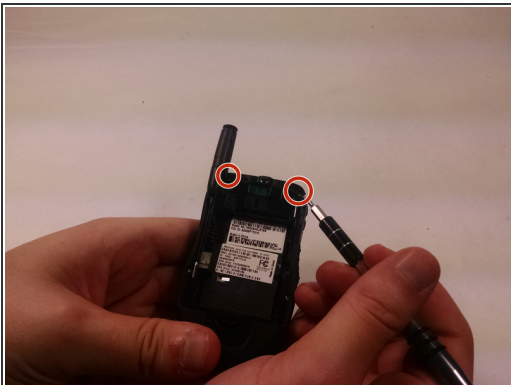

- Remove all six screws
- The two top screws here
- The two middle screws here.
- And the two bottom screws here, they are covered by plastic pieces that first must be removed with the nylon Spudger.

Step 5



- then carefully lift the front off the phone.
- Marked wire will have to be solderd when re-connecting new screen
- Speakers are connected to the screen here.

To reassemble your device, follow these instructions in reverse order, soldering wire onto new screen.

This document was last generated on 2017-06-24 03:13:52 PM.